

**CLASSIC FRAME (S and C-Series)**

uses



LODGING



OFFICE



MEDICAL OFFICE



DORMITORIES



BUILDINGS OF WORSHIP



ASSISTED LIVING



MULTI-FAMILY




SCHOOLS



HOSPITAL NON SURGICAL



SINGLE FAMILY

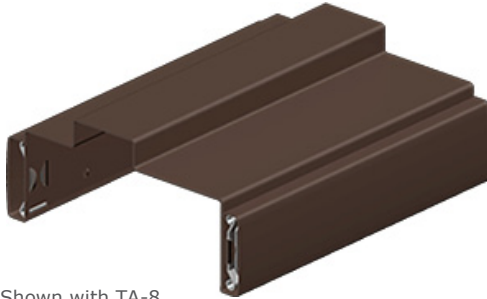

Shown with TA-8 Steel Casing as example.

Our new **GalXC™** material is now standard for all Timely door frames raising the quality and performance properties to the highest level at an exceptional value. **GalXC** is a Hot Dipped Galvanized product that provides superior corrosion resistance in the harshest environments while balancing outstanding surface, gauge, and shape quality.

Our GalXC Hot Dipped Galvanized Classic Frame is our most popular profile. It is the ideal solution for most commercial drywall applications.


Our Classic Frame is available in two material thicknesses, **S-Series** (20 gauge) and **C-Series** (18 gauge) prefinished hot dipped galvanized steel.

Finishing options include 2 standard colors, 4 premium colors, 30 pre-matched custom colors, project matched custom colors or primed for field painting. GalXC is easier to specify, ALL Timely frames are now made of GalXC, so they can be installed in any environment.

Fire ratings up to 90 minutes are available for non-glazed openings, and up to 45 minutes for glazed openings.

Mullions are available in all jamb depths from 3 1/2" to 13".

Classic Frames will accommodate either a 1 3/8" or 1 3/4" door weighing up to 500 lbs.

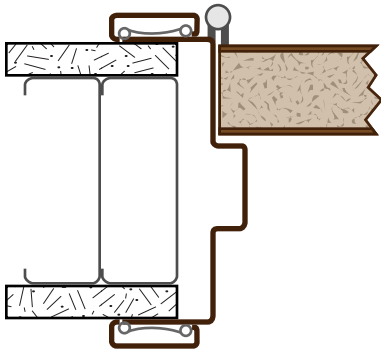

1A

Jamb Hinge Side

**STANDARD JAMB DEPTHS**

**S-SERIES (20 gage):** 2 1/4", 2 7/8", 3 1/2", 3 3/4", 4", 4 5/8", 4 7/8", 5" and 5 3/8"

**C-SERIES (18 gage):** 2 1/4", 2 7/8", 3 1/2", 3 3/4", 4", 4 5/8", 4 7/8", 5", 5 3/8", 6 5/8", 6 7/8" and 7 1/4"

**CUSTOM JAMB DEPTHS**

**C-SERIES (18 gage):** 2 1/4" to 13" in 1/8" increments.

NOTE: The available jamb depths and door weights listed here apply to the Classic Frame in general. Some limitations may apply when looking at specific information. For example a communicating frame must have a larger minimum jamb depth than listed here.